

HOW TO MAKE A PLEATED SKIRT

NOTES

L = LENGTH OF SKIRT FROM BOTTOM OF WAISTBAND TO HEMMED EDGE
W = FINISHED WAISTBAND CIRCUMFERENCE
SEAM ALLOWANCE = .5" WB = WAISTBAND

PATTERN DRAFTING
WORKSHEET

WAISTBAND

CUT 1: W/ DIMENSIONS: $\langle W + 2" \rangle \times 4" = \underline{\hspace{1cm}} \times 4"$


SKIRT FRONT

CUT 2: W/ DIMENSIONS: $\langle 1.5 * W + 1" \rangle \times \langle L + 1.5" \rangle$
 $= \langle \underline{\hspace{1cm}} \rangle \times \langle \underline{\hspace{1cm}} \rangle$


AND BACK

SEWING
THE SKIRT

- 1** WITH RIGHT SIDES TOGETHER STITCH SIDES OF SKIRT AND APPLY 7" ZIPPER AT TOP OF LEFT SIDE.

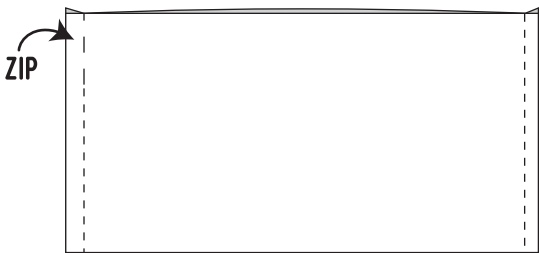


- 2** FOLD WB IN HALF LENGTHWISE, RIGHT SIDES TOGETHER. STITCH SHORT ENDS.
* MARK 1" FROM FINISHED EDGE FOR TAB OVERLAP ON LEFT SIDE AND HALFWAY BETWEEN MARK AND RIGHT SIDE SEAM.

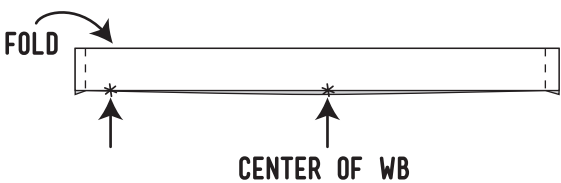


- 3** PIN WB TO SKIRT RIGHT SIDES TOGETHER MATCHING SIDE SEAMS TO MARKINGS AND ZIPPER TO ENDS OF WB.

- 4** PIN PLEATS OF DESIRED WIDTH AND DIRECTION TO WB. STITCH IN PLACE.
NOTE: STITCH THROUGH ONLY *ONE* LAYER OF WB. OTHER SIDE FUNCTIONS AS FACING.

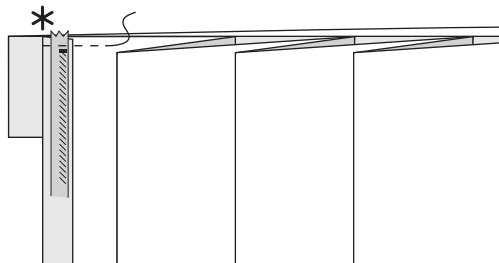

- 5** TURN IN RAW EDGE OF WB. STITCH IN PLACE BY HAND OR MACHINE. ATTACH HOOK AND EYE TO WB TAB OVERLAP.

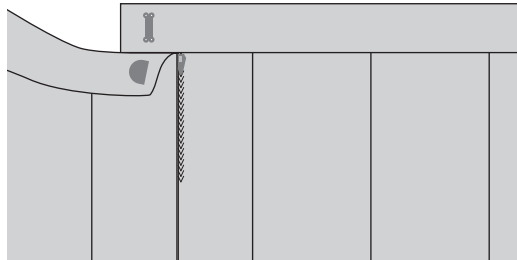

- 6** HEM SKIRT 1.5" BY MACHINE OR HAND.